


GENERAL NOTE: Distances from pipes to the up and down stage walls and between pipes is not to scale.

SPECIFIC DEMO NOTES:

- 1) Remove all soft goods and store or discard as per the Owner's instructions.
- 2) Remove existing operating line, tensioner, and carriers and store or discard as per the Owner's instructions.
- 3) Remove scenic track and lighting fixtures and and store as per the Owner's instructions.
- 4) Remove scenic track and set aside to be rehung on pipe #15 later, as per the Owner's instructions.
- 5) Strike Pipe and existing rigging to Prep for Thern “Pilewind” Hoist System installation (See Section 11 61 33 Appendix A and Drawing TR-1).
- 6) Remove Traveler Track, Pipe, and Existing Rigging and set aside as per the Owner's instructions, to be rehung later downstage of the 4th (Cyc) Electric.
- 7) If ADDER #1 is approved, remove pipe and existing rigging to prep for Thern “Pilewind” Hoist System installation (See Section 11 61 33 Appendix A and Drawing TR-1). Otherwise, leave the pipe dead-hung in it's existing position.
- 8) If ADDER #2 is approved, remove pipes and their existing rigging to prep for Thern “Pilewind” Hoist System installation (See Section 11 61 33 Appendix A and Drawing TR-1). Otherwise, leave the pipes dead-hung in their existing position.
- 9) Remove 4th Leg Tracks and Store as per the Owner's Instructions. and set aside to be rehung on pipe #15 later, as per the Owner's instructions.

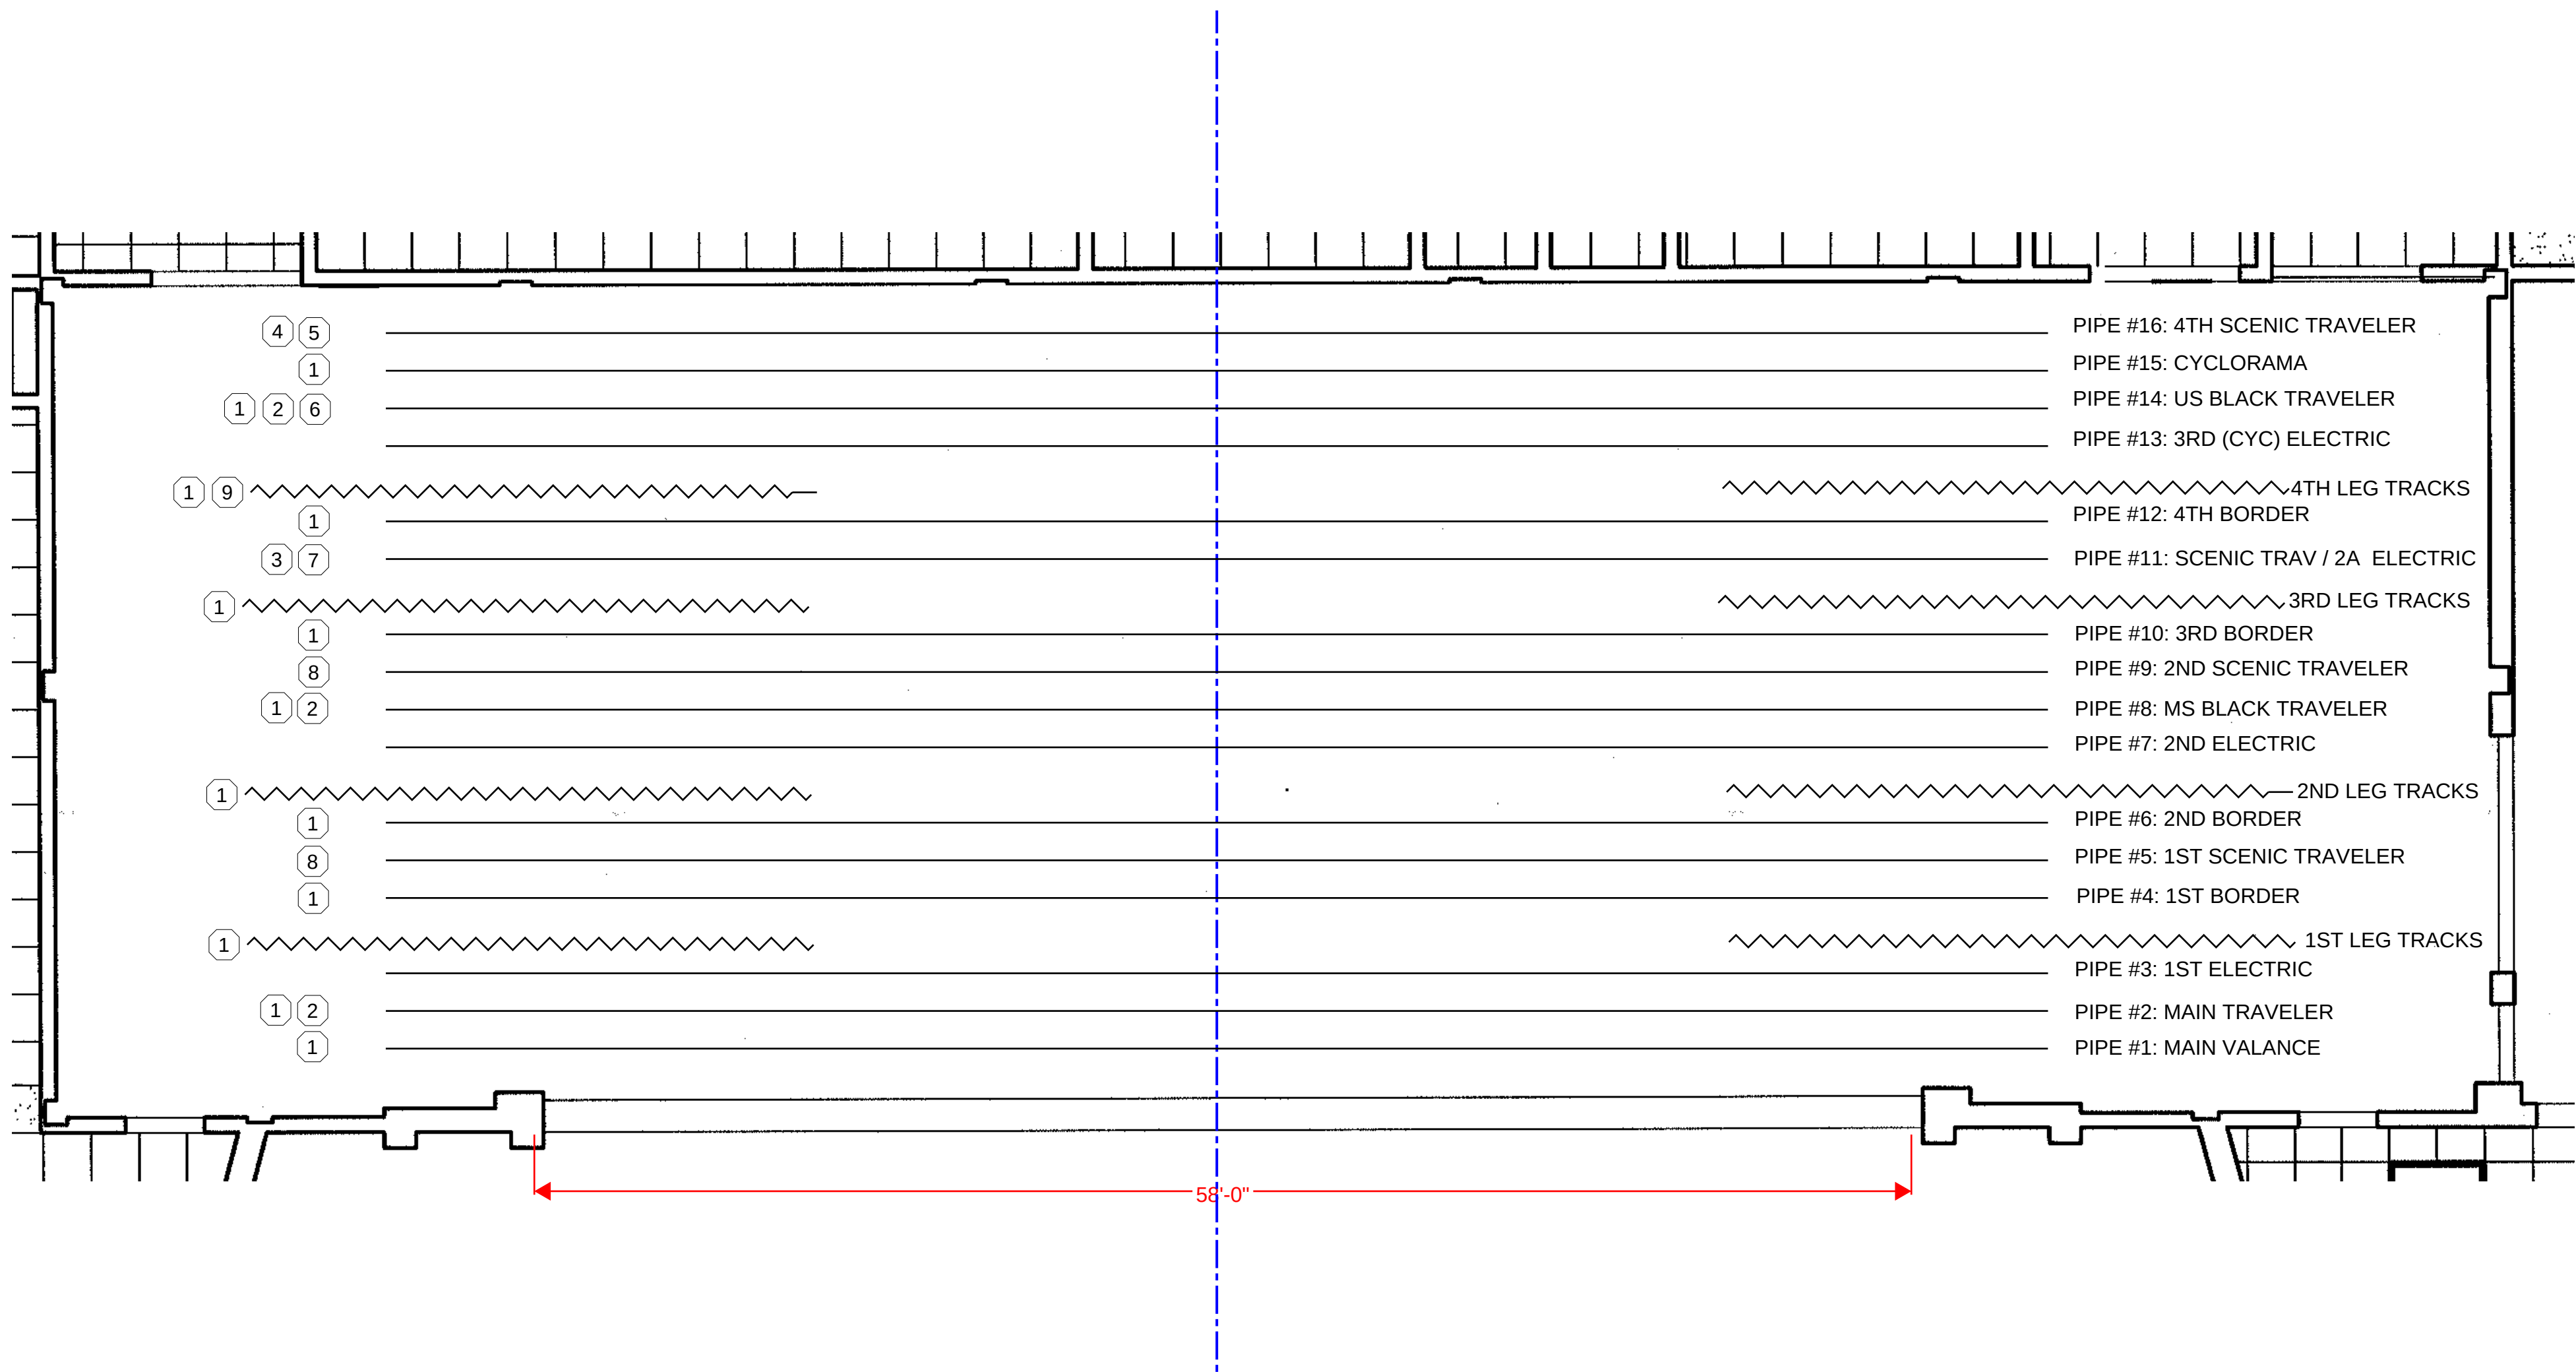

ISSUE DATE:	ISSUED FOR:
8/31/2026	FINAL TEAM REVIEW
9/9/2026	REVISION FOR FINAL TEM REVIEW
9/10/2026	FINAL VERSION FOR BIDDING AND INSTALLATION



R. Blain Consulting LLC
Designer - Specifier - Project Manager

22813 Overlake Street
Saint Clair Shores, MI 48080
(313) 316 – 5639
rblain.com

PROJECT
GOODRICH AREA
SCHOOLS AUDITORIUM
THEATRICAL DRAPERIES
AND RIGGING UPDATES

Goodrich Area Schools
8029 S Gale Rd.
Goodrich, MI 48438

PROJECT# AUD2026

SHEET
Rigging Demo

DRAWN BY:
RUSS BLAIN
R. BLAIN CONSULTING LLC

DRAWING # TR-2

SCALE: 3/8" = 1'-0"