


GENERAL NOTE: Distances from pipes to the up and down stage walls and between pipes is not to scale.

SPECIFIC PLAN NOTES:

- 1) Install new operating line, tensioner, and carriers.
- 2) Install new soft goods.
- 3) Reset border trim as per Owner's instructions.
- 4) As part of the Base Bid, install a Thern “Pilewind” Hoist System (See Section 11 61 33 Appendix A and Drawing TR-1).
- 5) If ADDER #1 is approved, install a Thern “Pilewind” Hoist System on this pipe (See Section 11 61 33 Appendix A and Drawing TR-1). Otherwise, leave the pipe dead-hung in it's existing position.
- 6) If ADDER #2 is approved, install a Thern “Pilewind” Hoist System on these two pipes (See Section 11 61 33 Appendix A and Drawing TR-1). Otherwise, leave the pipes dead-hung in their existing positions.
- 7) Install scenic track previously removed from Pipe #16.
- 8) As part of the Base Bid, install the pipe and Traveler Track previously removed from it's position upstage of the CYC Electric, in the space formerly occupied by the "4th Leg Tracks.

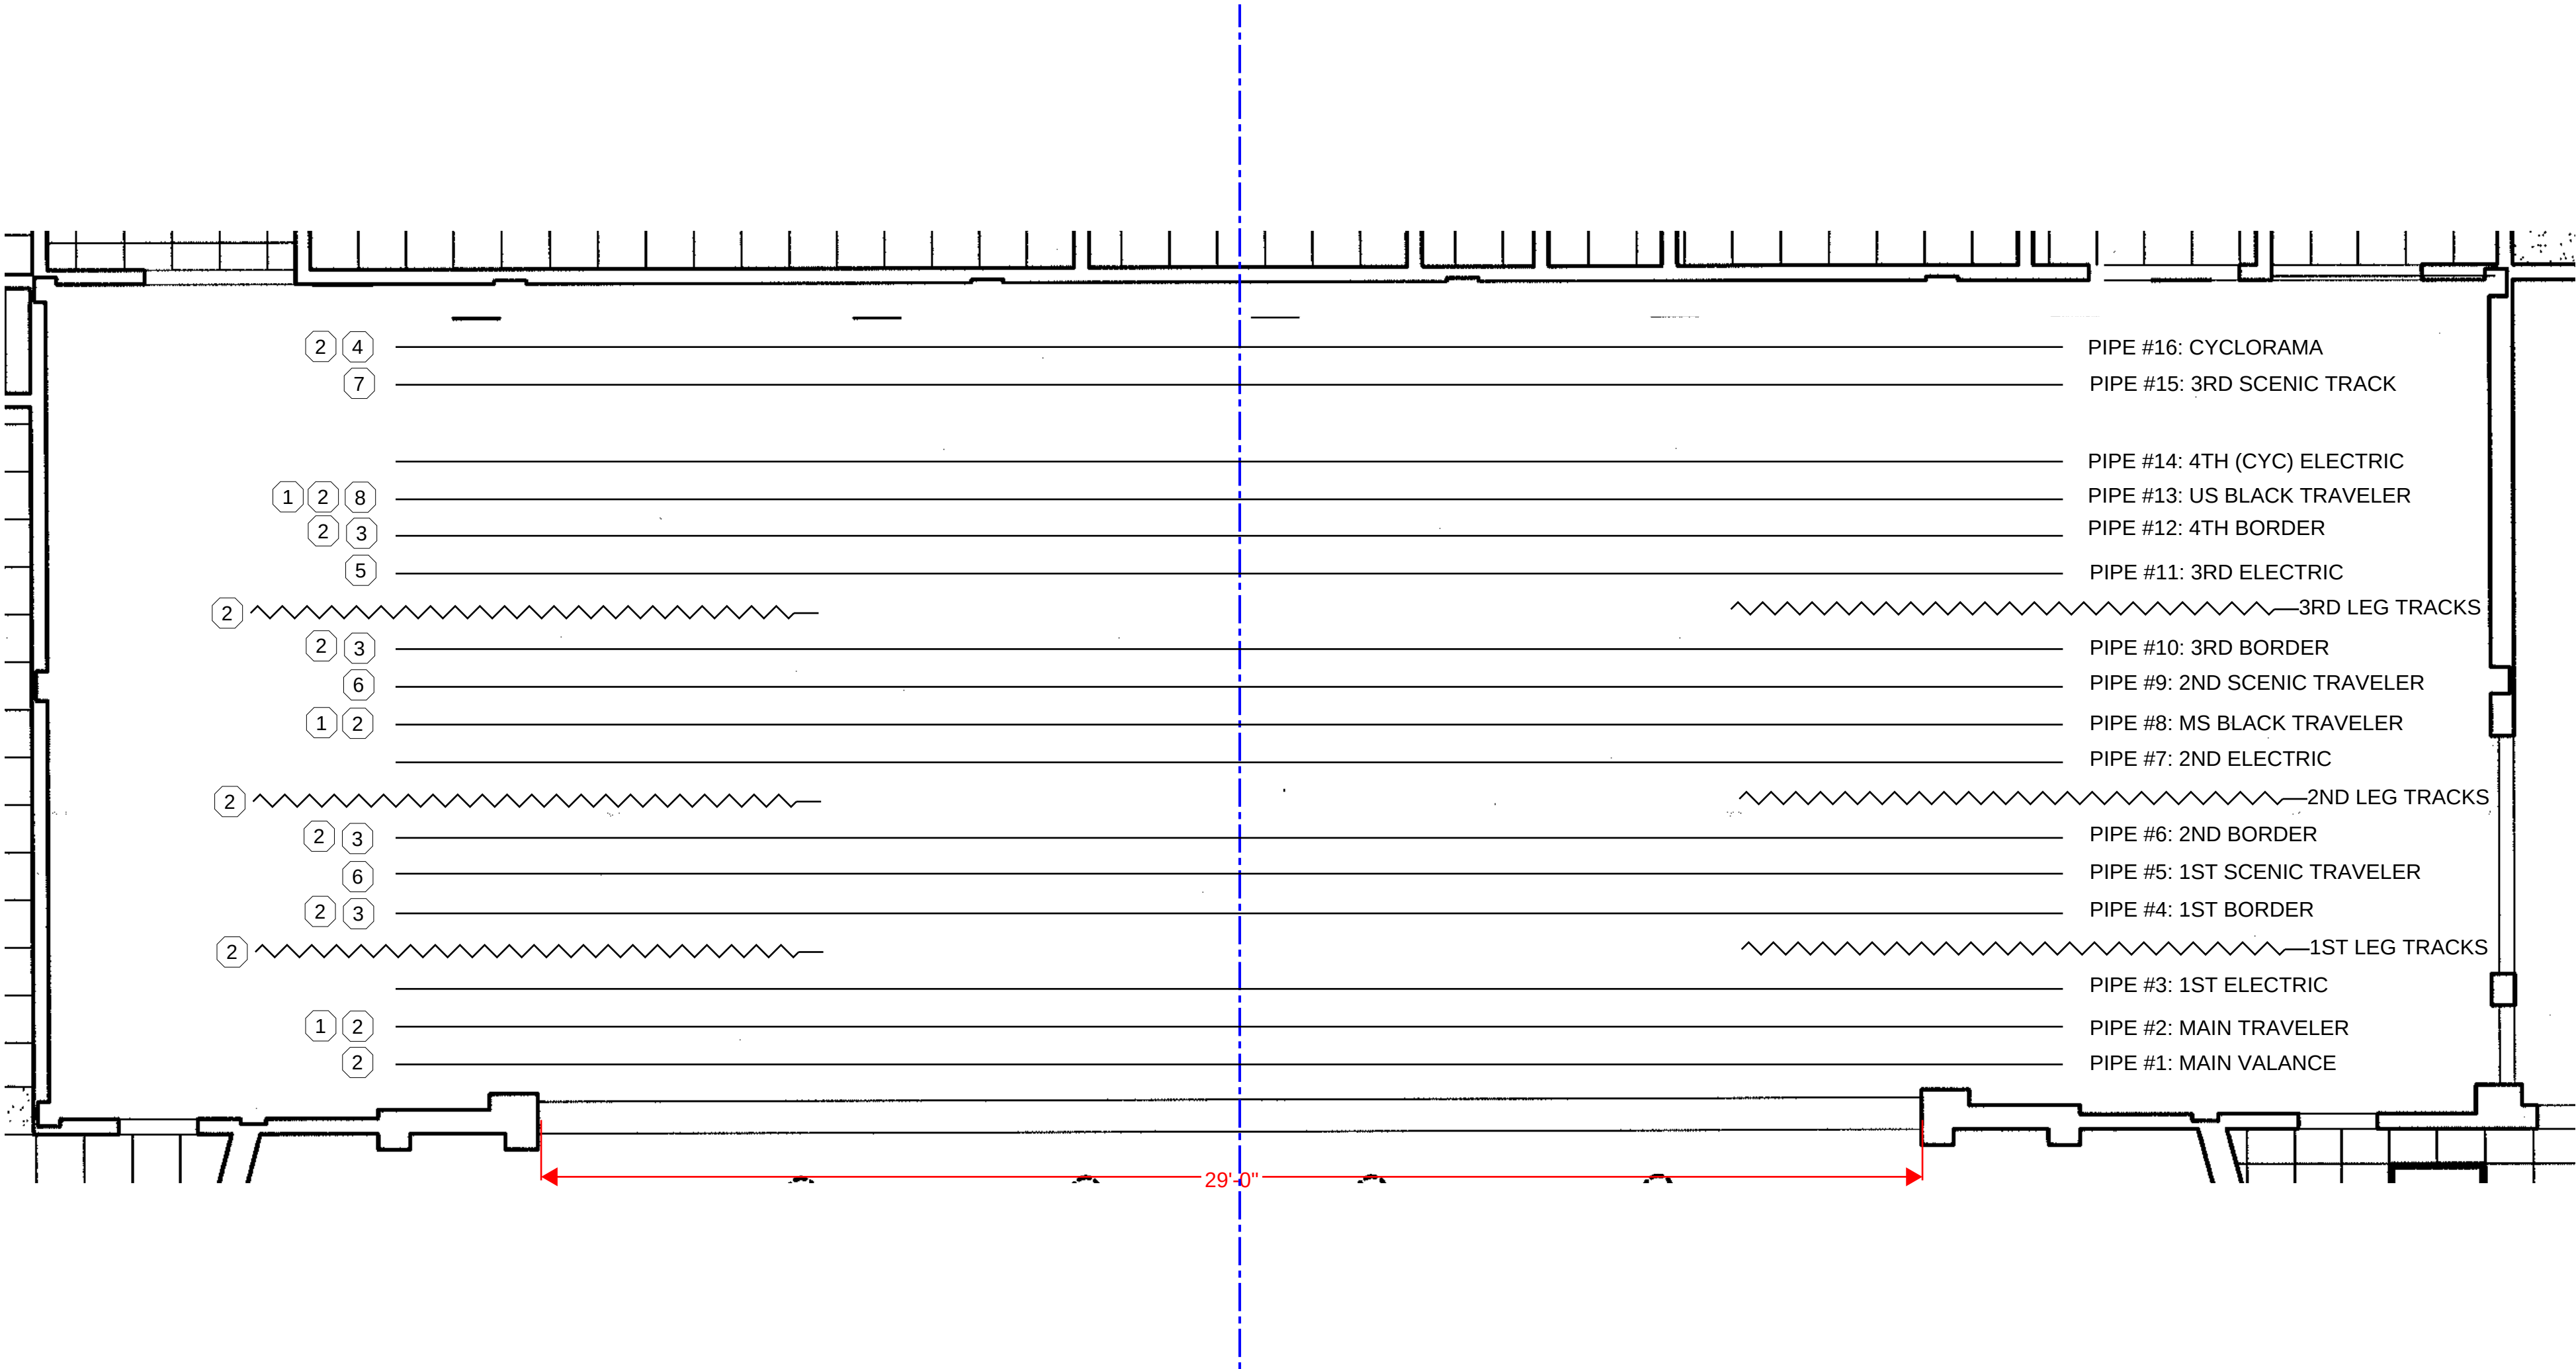

ISSUE DATE:	ISSUED FOR:
8/31/2026	FINAL TEAM REVIEW
9/3/2026	REVISION FOR FINAL TEAM REVIEW
9/9/2026	REVISION FOR FINAL TEAM REVIEW
9/10/2026	FINAL VERSION FOR BIDDING AND INSTALLATION



22813 Overlake Street
Saint Clair Shores, MI 48080
(313) 316 – 5639
rblain.com

PROJECT
GOODRICH AREA
SCHOOLS AUDITORIUM
THEATRICAL DRAPERIES
AND RIGGING UPDATES

Goodrich Area Schools
8029 S Gale Rd.
Goodrich, MI 48438

PROJECT# AUD2026

SHEET
Rigging Plan

DRAWN BY:
RUSS BLAIN
R. BLAIN CONSULTING LLC

DRAWING # TR-3

SCALE: 3/8" = 1'-0"