

Texas A&M Corps of Cadets Specifications Trousers, Boot, Male, Pink Elastique

Description: Pink Elastique material: 16.5 – 17 oz. 55% Dacron Polyester, 45% Wool elastique, two-ply Raeford #645-437 (approx. 1 ½ yd. per pair)

Waistband to be finished in an open manner (Browne outlet method) with a minimum of two and one half inch outlet showing no raw edges. Waistband seam shall be pressed open.

Each pair requires elastic material inset from knee to bottom of leg. Four pockets, one watch pocket, and white inside patches at both knees. 15" Elastic foot straps. All pocket lining to be poly/cotton twill. All interlining to be poly/cotton.

Please refer to all photos and drawings.

Seven Belt loops lined with pellon. 1" wide to accommodate a 2" belt.

Trousers shall be constructed with a "Browne outlet" as noted above and shall have a one inch inseam outlet in back panel from crotch to full length of inseam.

The following is in addition to the basic uniform item specification and pertains to the elastic material in the leg calf section.


1. Elastic material in the calf region should be colorfast dyed Hornwood fabric. Pink tan warp knit #8593-37432.
- 2.
3. The elastic material must have the capability of stretching no less than 1.25X its original capacity and should have a smooth woven appearance, like the fabric. Furthermore, there should not be a rough appearance at the calf or knee.

STITCHING TECHNIQUE FOR SECURING KNEE PATCHES

Double stitch the patch to the trouser leg. There will be three sharp pivot points at the corners. Back stitch about ¼ to 3/8 inch on either side of the corners, then proceed on the next side without breaking the thread. Turning the garment during the course of this operation will make this possible. The object is to get well secured patch at these friction points. Continuous stitching with reinforced points will do this. There is no need to back-stitch the two slowly turning curves. They can be stitched in one motion. Please refer to the diagram for further clarification.

See attached illustrations for measuring guides and general appearance.

7

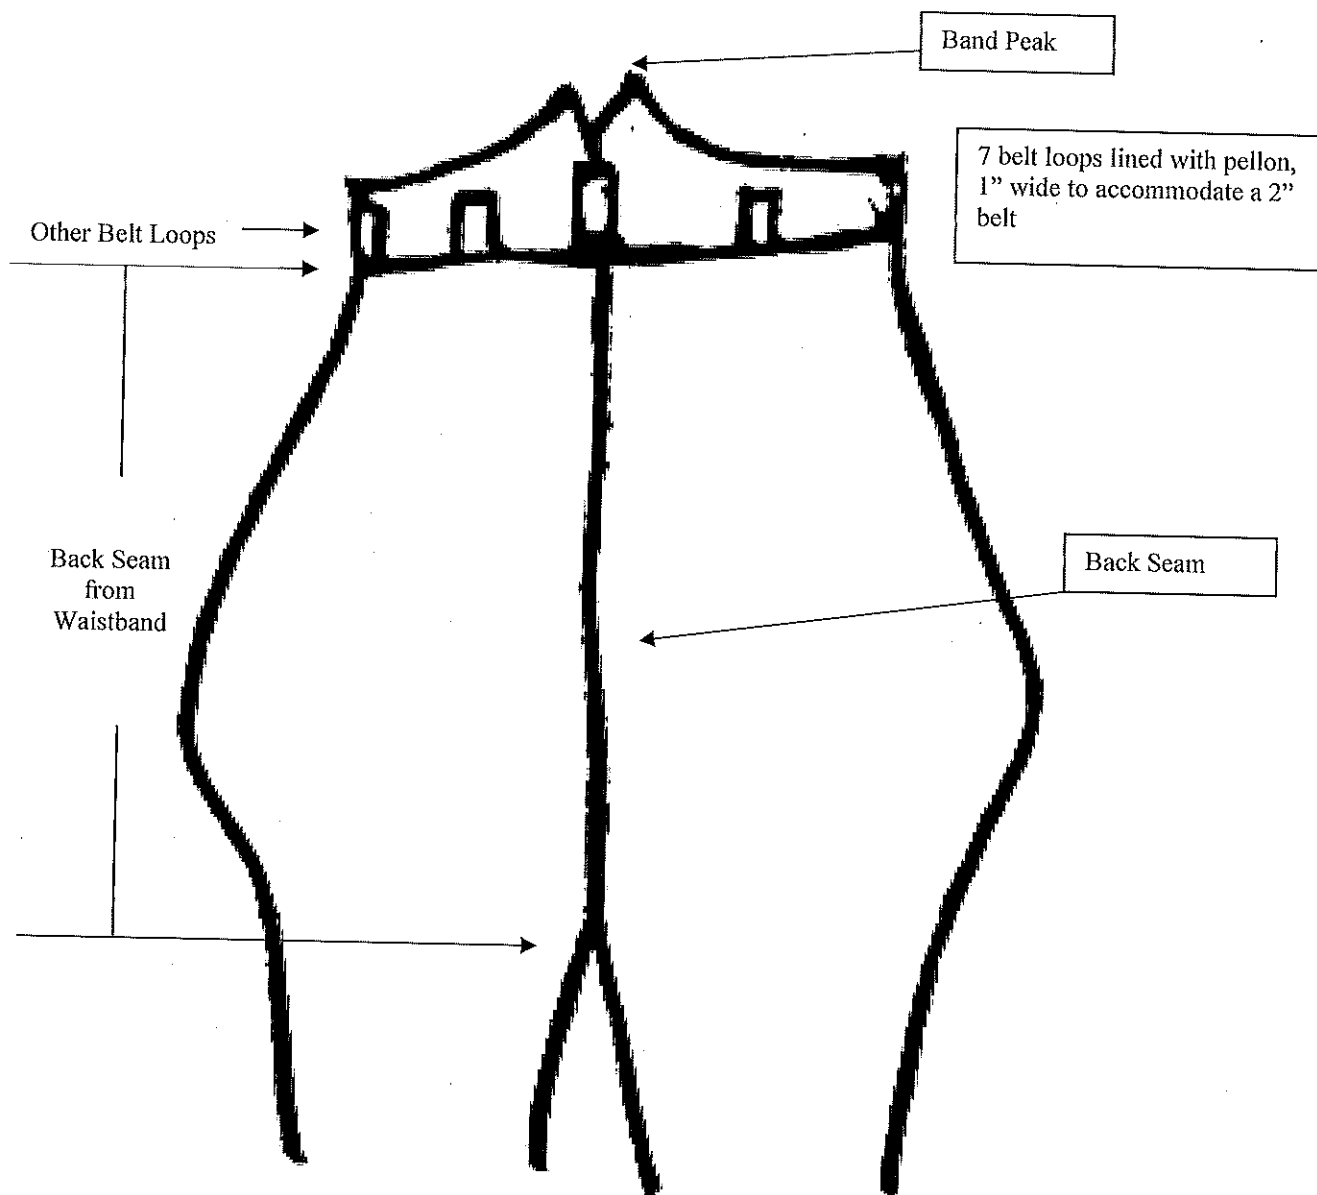

Supplemental Drawing A
(Shown without pockets)

TEXAS A&M SPECIFICATIONS
Male, Pink Elastique Boot Trouser
Style # 01043

- STYLE:** Flared hip male trousers constructed with a plain front, no pleats or darts. Concealed zipper flap at front center. Trouser to have a 1-inch inseam outlet in back panel from crotch to full length of inseam.
- FABRIC:** To be 55% Dacron Polyester / 45% Worsted wool. Elastique. Two ply warp / two-ply filling; 16 to 16.5 oz. Raeford style #645-437. The fabric shall be kaumographed.
- ZIPPER:** A number 5 talon, 8-inch long, heavy-duty metal zipper, with top stop. Zipper tape to be of matching color. Heavy-duty double hook and eye closure (concealed) at top center above the fly zipper. Bartacking at base of zipper.
- WAISTBAND:** Set-on tapered waistband with rayon twill interlining, to be matching color. Inset with Snugtex, or equivalent, elasticized interlining insert. "Browne outlet" method finished in an open manner with a minimum of 2-½ inch outlet showing no raw edges. High back construction waistband is 4 inches wide at the center back and tapers to 2 ¼ inches high at front center. An open "v" notch at top center back of waistband goes down to the top of the belt loop and is bartacked. (FIGURE 2, page 47). Secure stitching required.
- POCKETS:** Total of four pockets and one watch pocket. Two straight side type pockets with edge top stitching. Fob pocket is inserted at right front and bartacked at ends. (FIGURE 3, page 48). Side pockets to have a 4-inch opening across top and also a 4-inch opening down the side seam. A matching bone button with buttonhole at upper corner of both front pockets. Two set-in hip pockets with "v" shaped pocket flaps, with concealed button flap for opposing Potomac Melamine button of matching color. The flap is to be 2 inches from the top to the bottom of the "v" shape with ¼ -inch top stitching. All pocketing shall be rayon twill. All pockets bartacked.
- BELT LOOPS:** Seven belt loops measuring 1-inch wide x 2-¼ inches inside height to allow for a 1-½ -inch belt. The 7 belt loop locations are as follows: (1) centered on back seam, (2) set on front edge of side seam, (2) spaced equidistant between back seam and side seam loops, (2) spaced equidistant between side seam loops and front of trouser. Secure stitching required both for attachment to waistband and actual top stitching of loops.
- KNEE PATCH:** White indestructible cloth knee patch on inside of each leg. Pointed at the top and curves to a width of 5-inches. Overall height is 11-inches.

Patch is to be double stitched to the trouser leg and back stitched at the two bottom corners and at the top point. (FIGURE 1, page 46)

BOTTOMS:

Calf section of legs to have colorfast elastic material, Hornwood fabric or equal, matching the color of trouser. Self-fabric hem tape to be sewn on bottom of each pant leg. Elastic strap with finished length of 13-½ inch +/- ½ inch on each leg bottom.

THREAD:

Thread shall be spun polyester and shall be identical match to fabric.

LABELS:

Permanent size markings are required on all garments. Information to be Included is a manufacturer's ID label, proper care label, waist and inseam measurements.

SHIPPING:

It is requested that the trousers are shipped separate from balance of order to accommodate for warehouse space and the inspection process.

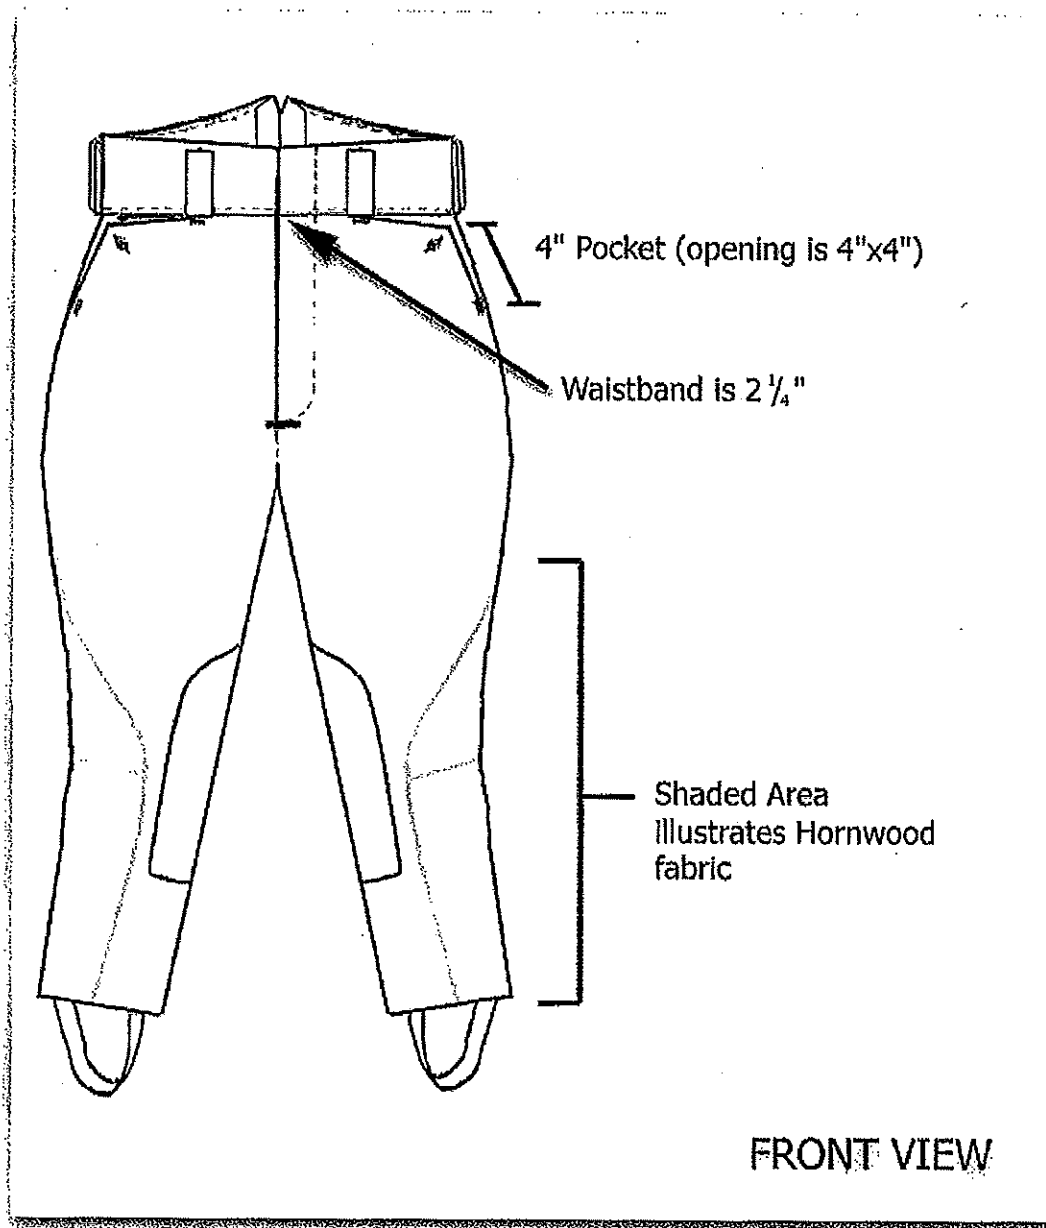


Figure 1

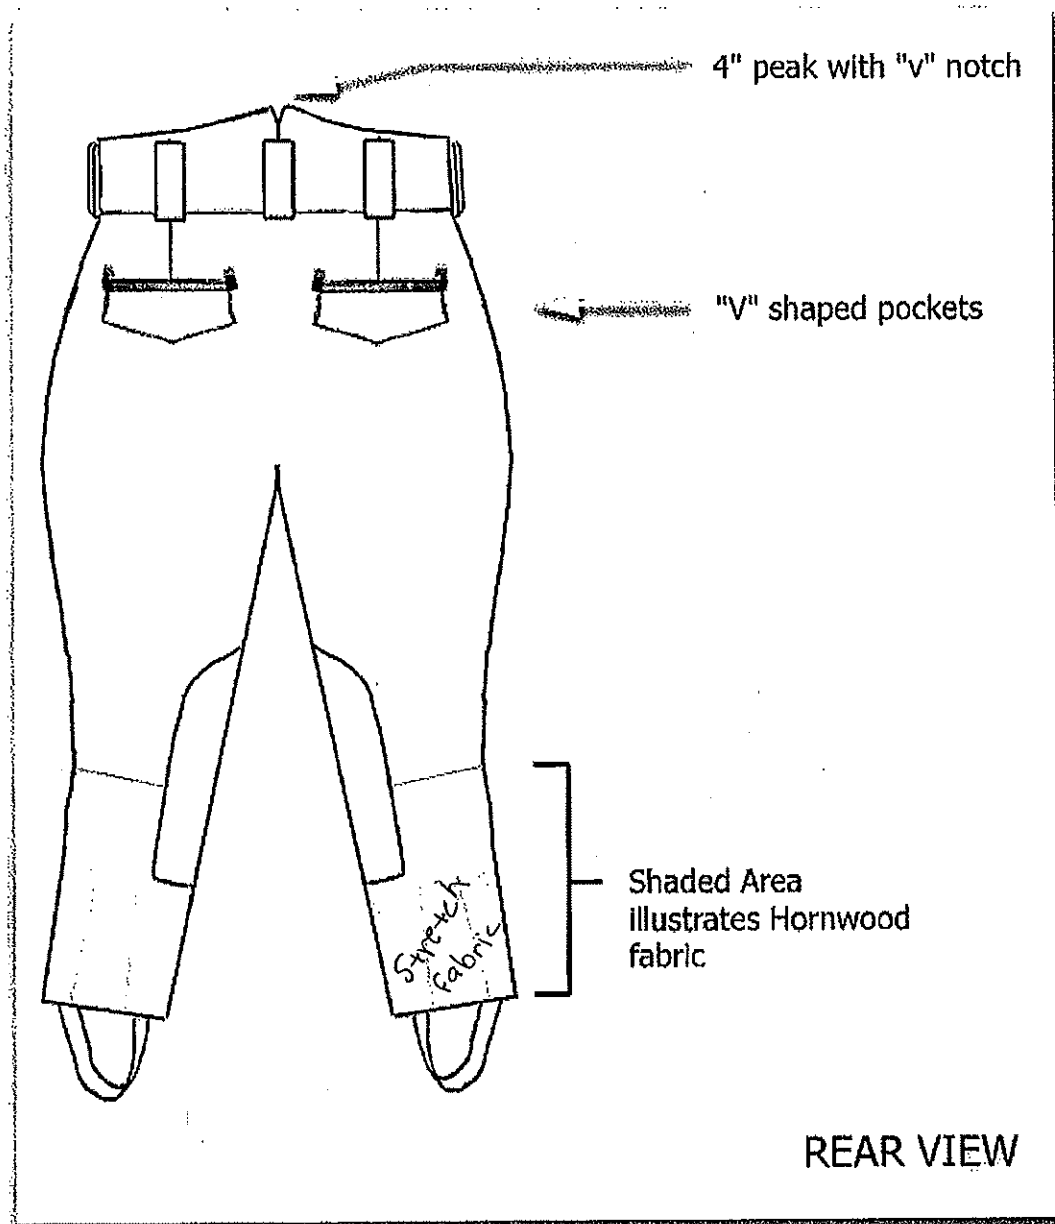


Figure 2


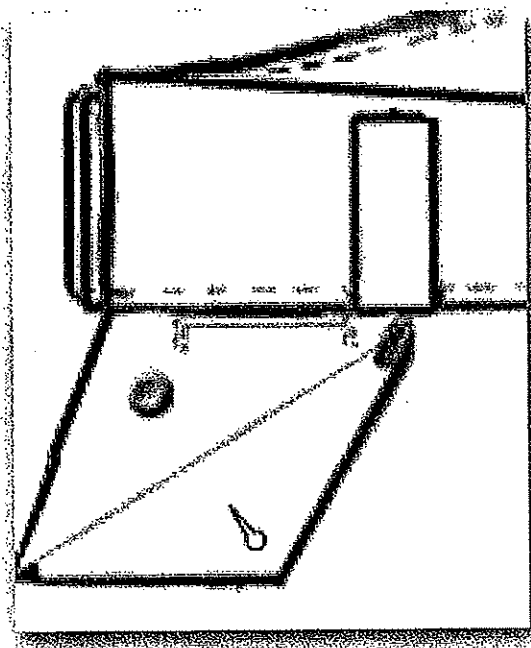


Figure 3

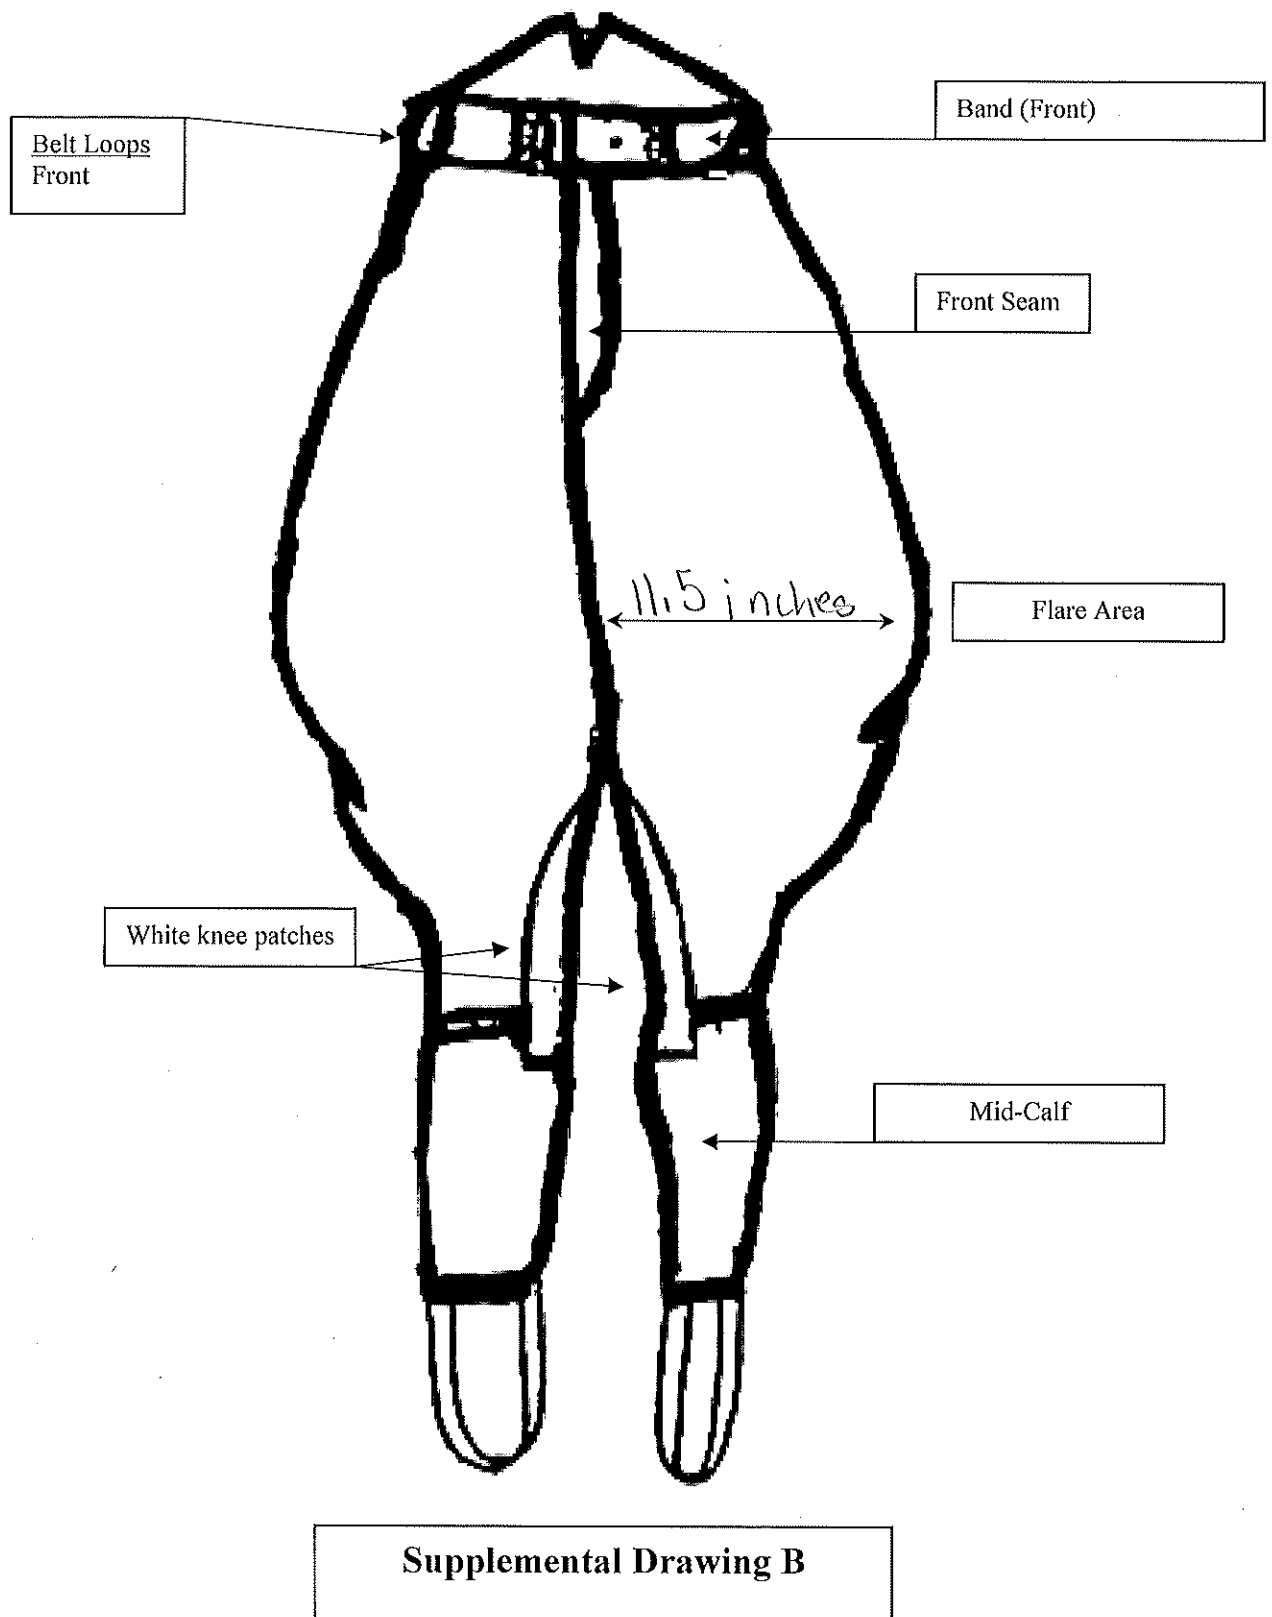

All waistbands are 2¼" wide from front then peaks in center back to 3 ¾" - 4"

Belt loops 2¼" in front and sides and peak center back 2 ¾" long.

30 Extra Short:

Zipper and front seam from waist band measurement	9"
Back seam from waist band measurement	15.5"
Inside leg from crotch to knee	14.5"
Knee down to bottom of leg	9.25"
Mid-Calf	14"
Around bottom of leg	11"
Flare mid section (Front)	11"

30 Short:

Zipper and front seam from waist band measurement	9"
Back seam from waist band measurement	15.5"
Inside leg from crotch to knee	15"
Knee down to bottom of leg	9.25"
Mid-Calf	14"
Around bottom of leg	11"
Flare mid section (Front)	11"

30 Regular:

Zipper and front seam from waist band measurement	9.75"
Back seam from waist band measurement	16"
Inside leg from crotch to knee	16.5"
Knee down to bottom of leg	10.25"
Mid-Calf	14"
Around bottom of leg	11"
Flare mid section (Front)	11.5"

30 Long:

Zipper and front seam from waist band measurement	9.75"
Back seam from waist band measurement	16"
Inside leg from crotch to knee	17.5"
Knee down to bottom of leg	10.25"
Mid-Calf	14"
Around bottom of leg	11"
Flare mid section (Front)	11.5"

30 Extra Long:

Zipper and front seam from waist band measurement	9.75"
Back seam from waist band measurement	16"
Inside leg from crotch to knee	18.5"
Knee down to bottom of leg	10.25"
Mid-Calf	14"
Around bottom of leg	11"
Flare mid section (Front)	11.5"



Photo 1

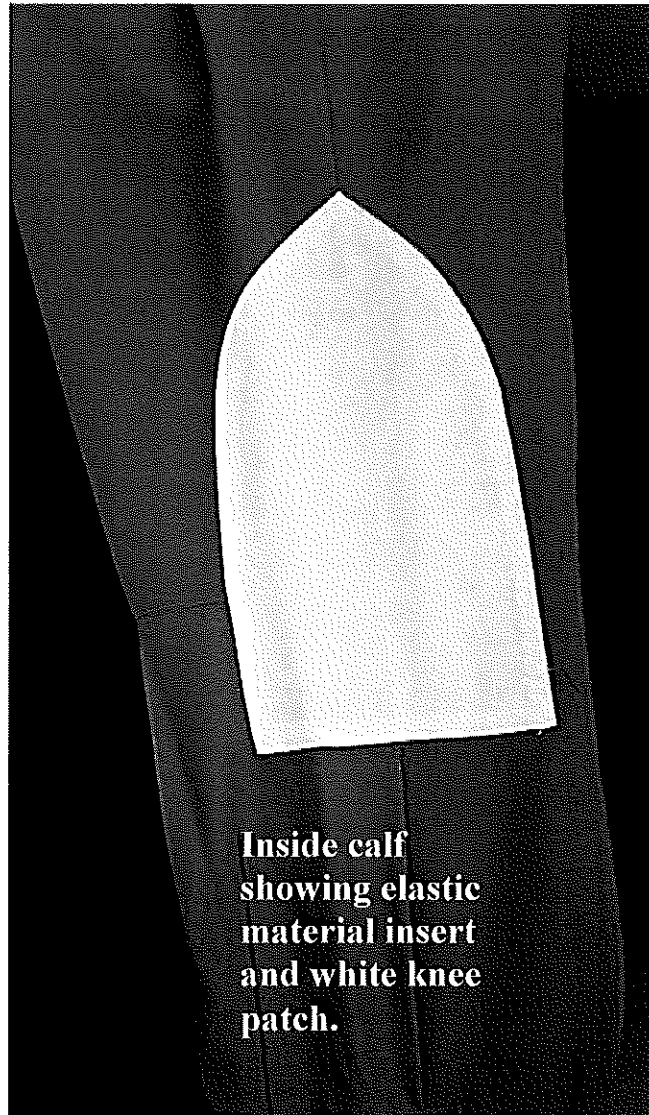


Photo 2

Inside of lower leg has an inset of white indestructible, which is pointed at top, but curving to a width of 5" and total height of 11".



Photo 3

Two hip pockets each have pocket flap with a built-in tab to button. Pocket flaps are to be top stitched. Use self-goods to line the flaps.



Photo 4

Fob pocket is inserted at right front and bartacked at each end. Side pockets have 4" opening across top and 4" down the outseam. Tan bone button with buttonhole at each upper corner.

Leg calf section
is Elastic material
Pink tan knit
capability of
stretching

